Sentinel® AC Two-Wire
Grid Configuration

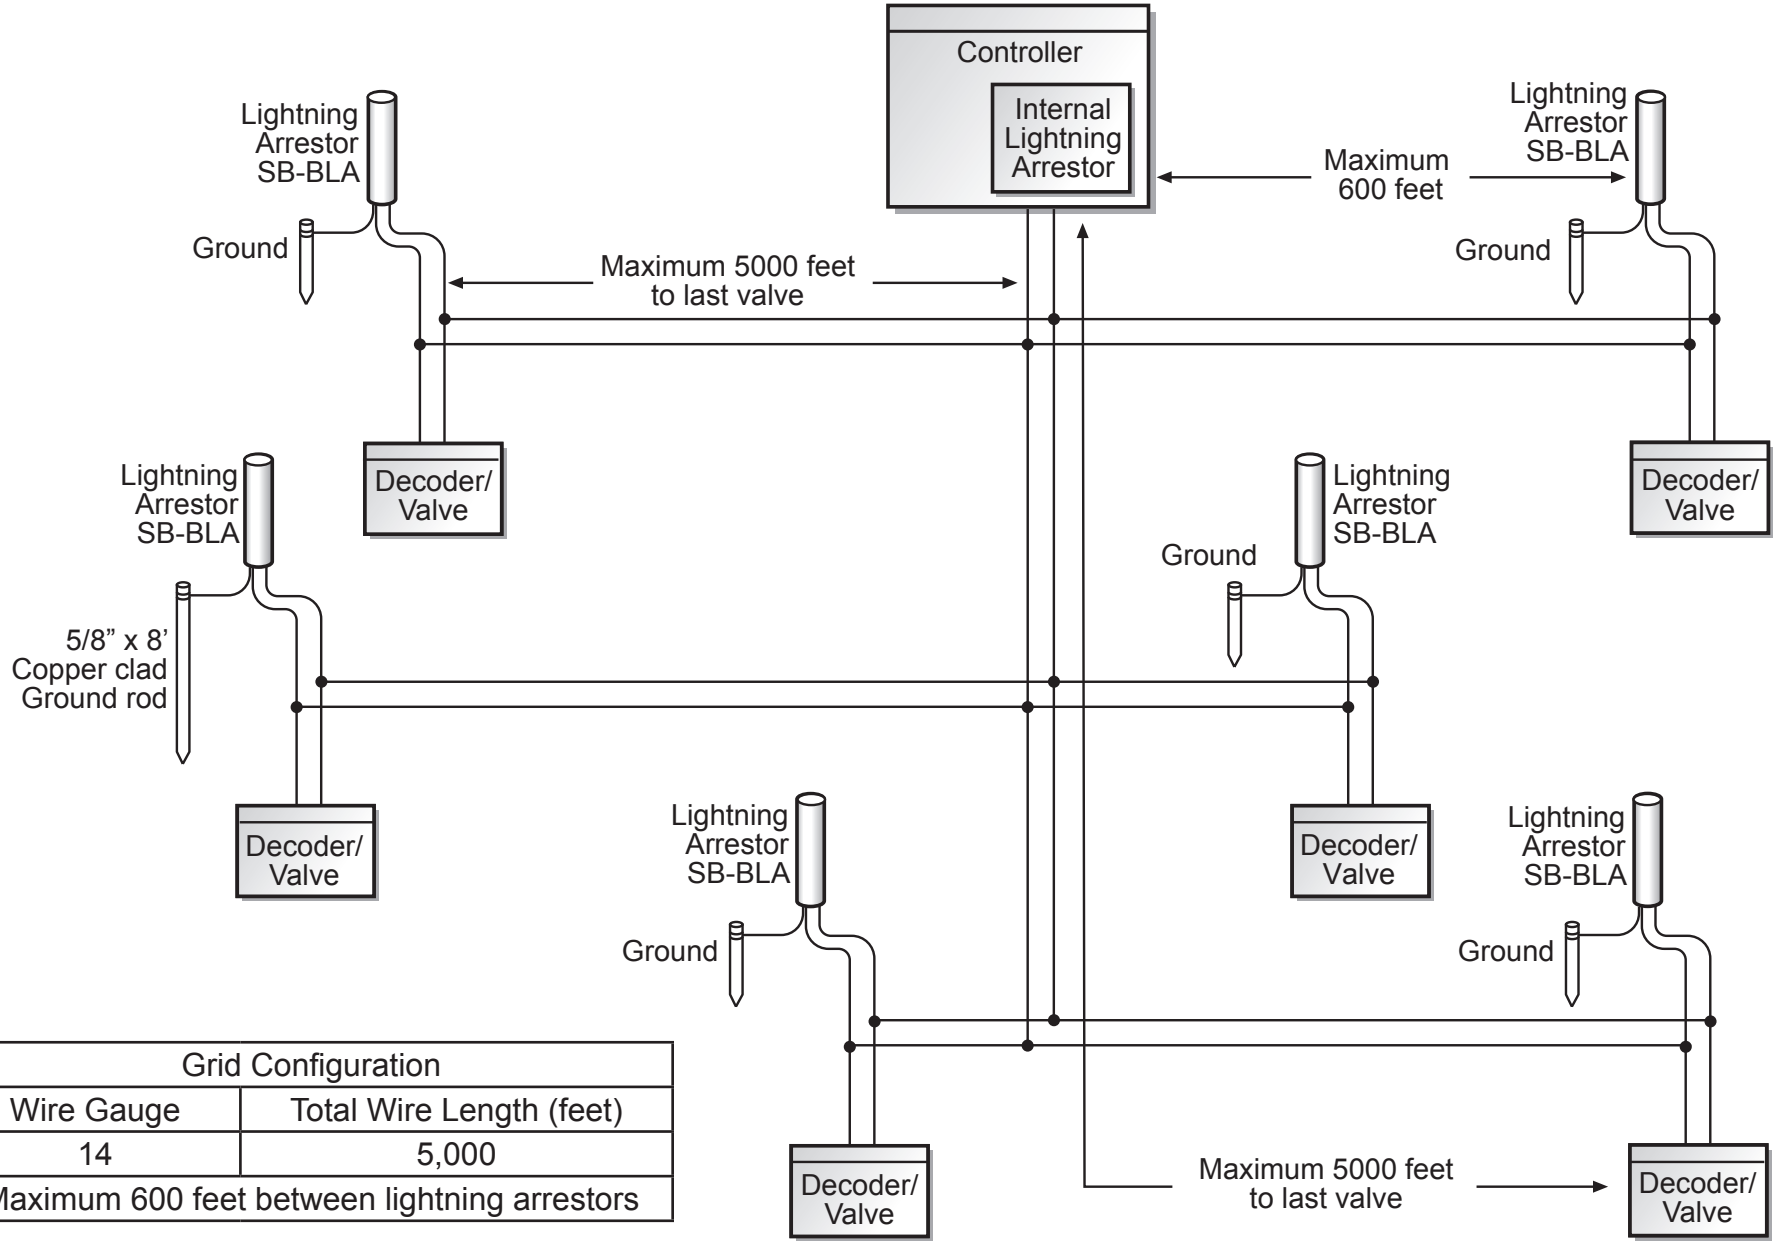

Grid Configuration	
Wire Gauge	Total Wire Length (feet)
14	5,000
Maximum 600 feet between lightning arrestors	

© 2016 The Toro Company • Irrigation Division • 1-877-345-8676